

2-in-1U 機架安裝套件

2K-0001 / 2K-0002 / 2K-0007

- ATEN 2-in-1U 機架安裝套件提供一款更加節省使用空間的架設方案，可將 CL3800/CL3700/CL3100 LCD 控制端和機架式 KVM 多電腦切換器共同架設在 1U 的空間內，讓使用者享有便利彈性的工作環境。

為符合使用者需求，ATEN 提供以下兩款 2-in-1U 機架安裝套件：2K-0001(搭配機架式 KVM 多電腦切換器) / 2K-0007 (搭配 KVM over IP 切換器) 為標準安裝，需兩個人合力完成上架；2K-0002 為簡易安裝，簡化了安裝流程，僅需一人即可完成上架。

透過 2-in-1U 機架安裝套件結合 LCD 控制端和機架式 KVM 多電腦切換器，使用者可以更有效率地利用工作場所，讓有限的空間不再是問題！

標準安裝
2K-0001 / 2K-0007



簡易安裝
2K-0002



透過 2-in-1U 機架安裝套件，使用者可將 LCD 控制端和機架式 KVM 多電腦切換器共同架設在 1U 的空間內，如下方實境照。



此安裝有兩項重點，詳情請參照快速安裝卡。


1. 將連接至 LCD 控制端的線材集中至右手邊的支架（從 LCD 控制端正面觀看），再用魔鬼氈束帶較窄的一端纏繞住所有線材。



2. 整理所有線材，適當地固定在 KVM 多電腦切換器和支架中間。



相容機種

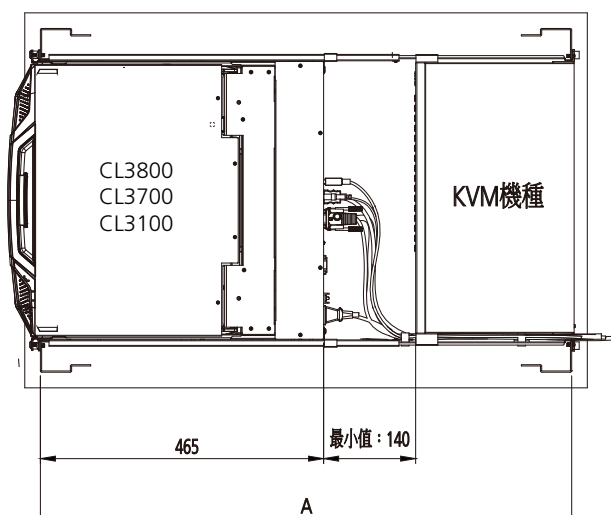

備註：A 表示適用深度。

LCD 控制端和 KVM 多電腦切換器功能性相容表

機架安裝套件	LCD 控制端	CL3800	CL3700	CL3100	KVM 多電腦切換器 深度 (mm)	適用機架深度 (mm)
	KVM 多電腦切換器機種					
2K-0001/2K-0002	CS1768	●	N/A	N/A	155	780-1050
	CS1754/CS1758, CS1308/CS1316, CS1708A/CS1716A, KH1508A/KH1516A/KH1532A, KH1508Ai/KH1516Ai	●	N/A	●		
	CS19208/CS19216	●	●	N/A	210	835-1050
	CS1798/CS17916	●	●	N/A	254	879-1050
	KN1108VA/KN1116VA	●	●	●	280	885-1050
2K-0007	KN4116VA/KN4132VA, KN2116VA/KN2132VA, KN1132V, KN4140VA/KN4124VA, KN2140VA/KN2124VA	●	●	●	407	1012-1050

產品資訊如有修改或變更，恕不另行通知。

宏正自動科技股份有限公司

221 新北市汐止區大同路二段125號3樓
電話: +886-2-8692-6969 傳真: +886-2-8692-6926
www.aten.com.tw E-mail: Taiwan@aten.com

Publish Date: 09/2020 V4.0



© Copyright 2020 ATEN® International Co., Ltd.
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
All rights reserved. All other trademarks are the property of their respective owners.