

# DSP Mixer with 4-ch Dante Input

## AD004E

The AD004E converts Dante inputs into 4-channel analog line outputs, integrating analog and digital audio devices into one single system through Dante AoIP media networking technology. This SHARC® ADSP-21489 processor embedded device supports 24 bit and offers sampling rate options of 44.1k, 48k, 88.2k, and 96 kHz, delivering advanced audio processing to meet commercial-grade application needs.

The built-in DSP allows 24 presets and speaker functionality management through the PC-based app Audio Wizard / ATEN VK control system via LAN / RS-232. A DSP matrix mixer is also contained to deliver DSP mixing and routing functions, enabling users to assign Dante inputs to any of the four analog outputs.

The AD004E is AES67 compliant, elevating interoperability between different audio networking protocols and devices. Plus, the unit comes with a selectable automatic Standby Mode for energy-saving purposes, switching the AD004E to Standby Mode automatically when the signal level runs lower than -50 / -60 / -70 dBu for a selected duration (10 / 30 / 60 minutes), allowing the system to consume less power. The AD004E supports redundancy operation thanks to its PoE functionality, eliminating the need for additional cable installations. All the features come in a compact half-rack size enclosure, and consequently, less rack space is needed and installation under desks or on any flat surface is made easy.

Not only does the AD004E enhance interoperability among AoIP devices and allow for speaker management, it also realizes distributed DSP systems when working with ATEN Pro Audio models, elevating installation flexibility, reducing overall cost, and broadening applications. It is suitable for professional audio scenarios utilizing the Dante networking technology, such as boardrooms, conference rooms, and hospitality venues such as restaurants and bars.



Front View




Rear View



## Features

- Converts Dante inputs into 4-channel analog line outputs
- Dante AoIP technology - replaces heavy, costly analog audio cables with cost-effective, easy-to-manage Cat cables
- AES67 compliant
- Adopts SHARC® processor ADSP-21489 to support 24 bit and offer sampling rate options of 44.1k, 48k, 88.2k, and 96 kHz
- Built-in DSP - allows 24 presets and speaker functionality management through PC-based app Audio Wizard / ATEN VK control system via LAN / RS-232
- Built-in DSP matrix mixer - enables users to assign Dante inputs to any of the four analog outputs
- Selectable automatic Standby Mode - the unit enters Standby Mode automatically when the signal level runs lower than -50 / -60 / -70 dBu for a selected duration (10 / 30 / 60 minutes)
- Supports PoE for redundancy operation and eliminating the need for additional wiring installations
- Compact half-rack size chassis - flexible installation inside racks and easy placement under desks or on flat surfaces
- Works with ATEN Pro Audio models to realize distributed DSP systems

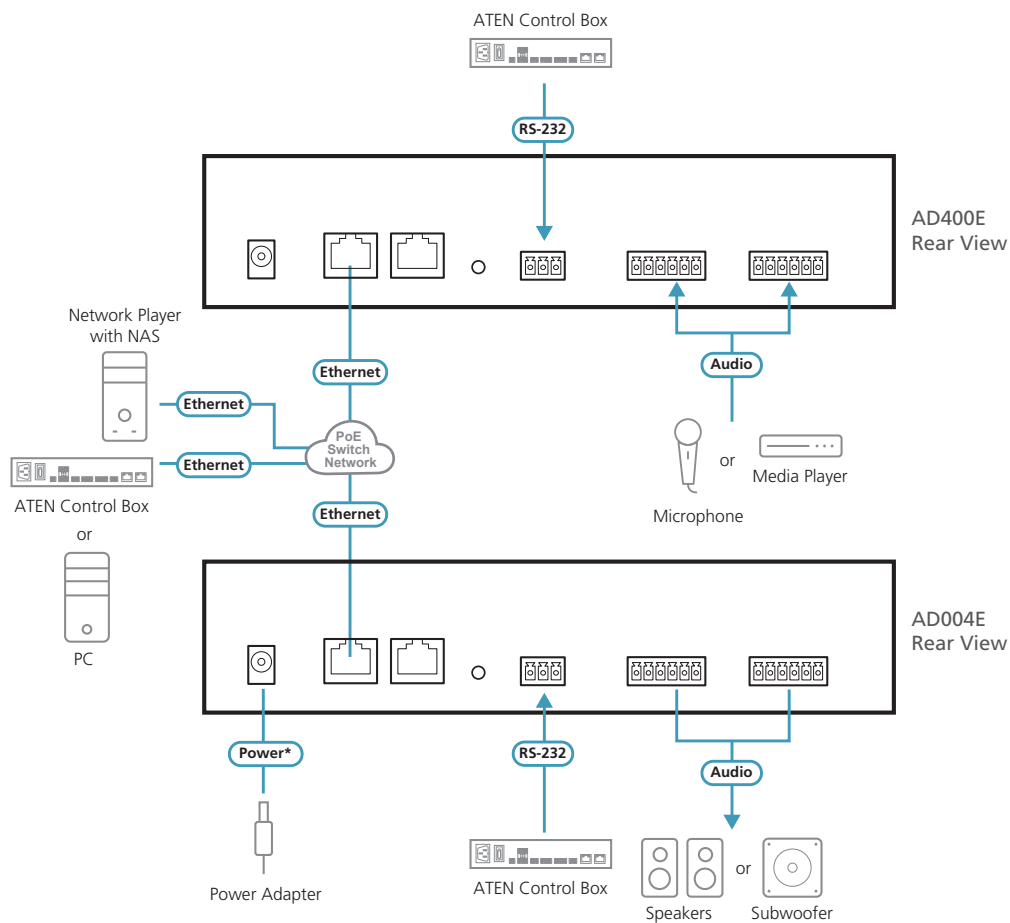

**Note:** The power adapter is sold separately and it supplies redundant power when PoE becomes unavailable. Please contact your ATEN dealer or go to ATEN website for available accessories and product information.

## Specifications

| AD004E                      |   |
|-----------------------------|---|
| <b>Line Outputs</b>         |   |
| Maximum output Level        | +24dBu, Nominal Input Level: +4dBu  |
| Impedance                   | 600Ω  |
| <b>System Specification</b> |   |
| Distortion                  | THD+N: <0.01%, 1kHz, Max. Gain  |
| Frequency Response          | 20 ~ 20kHz, +/-0.5dB  |
| Audio Sampling              | 24-bit, 44.1k/48k/88.2k/96kHz   |
| Crosstalk                   | <-95dB  |
| <b>Power</b>                |   |
| Power Consumption           | DC12V:3.83W (External power adapter is sold separately.)  |
| Power over Ethernet (PoE)   | 4.22W   |
| <b>Control</b>              |   |
| RS-232                      | Connector: 3-pin, 3.5mm, Terminal Block<br>Baud rate and protocol:<br>Baud Rate: 19200, Data Bits: 8, Stop Bits:1, Parity: No, Flow Control: No |
| Ethernet                    | RJ-45   |
| <b>Compliance</b>           |   |
| Certification               | FCC, CE, UKCA   |
| <b>Environmental</b>        |   |
| Operating Temperature       | 0 – 40 °C   |
| Humidity                    | 0 - 80 % RH, Non-Condensing   |
| Storage Temperature         | -20 – 60 °C   |
| <b>Physical Properties</b>  |   |
| Weight                      | 928 g   |
| Housing                     | Metal   |
| Dimensions (L x W x H)      | 15.4 x 20 x 4.4 cm  |

### ATEN International Co., Ltd.

3 F., No. 125, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan  
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
 www.aten.com E-mail: marketing@aten.com

Product information is subject to change without prior notice.

Released: 12/2025 V5.0

© Copyright 2025 ATEN® International Co. Ltd.  
 ATEN and the ATEN logo are registered trademarks of ATEN International Co., Ltd.  
 All rights reserved. All other trademarks are the property of their respective owners.

